


The **AHCe**[™] has been specifically designed for the higher cold aisle temperatures being applied in today's Data Centers. Applying this technology can provide the power, low water use installation and maintenance cost savings to the owner while lowering dramatically the PUE.

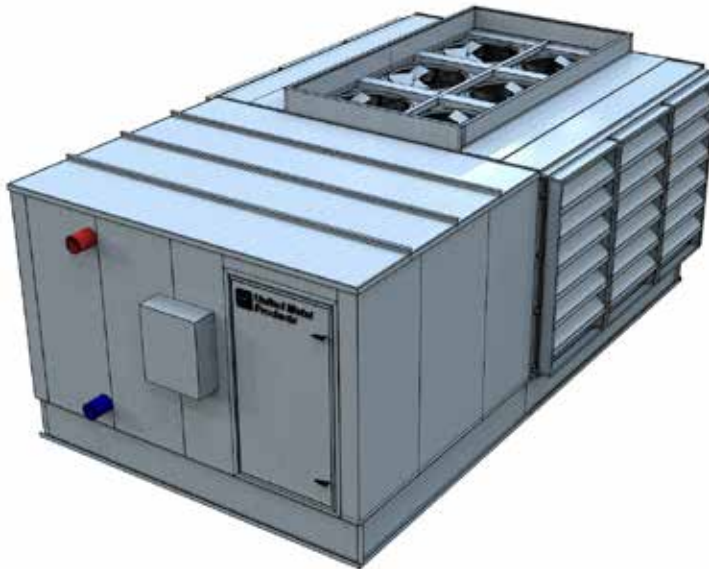

- **30 - 600 kW**
Cooling Capacity

Dry Cooling - Adiabatic Hydro Cooling with Trim Integrated Chiller

Why?

Power: It is estimated that data centers consume 2% of power produced in the U.S. The data centers of the future, both in the U.S. and abroad, must move from old legacy style infrastructure to energy efficient cooling strategies. The AHCe[™] is an excellent energy efficient solution.

Applications?

- Large Data Centers
- Colo-Facilities
- Modular Data Centers
- Containerized Data Centers
- Hi-Density Data Centers
- Upgrades to existing Data Centers
- Liquid base cooling load rejection

Where?

- Low wet bulb locations have the highest potential of free cooling hours.

- Applications where cold aisle temperatures are allowed above 60 degrees.
- Locations where winter outside air economizer mode is applied.

Features:

- **Indirect Evaporative Cooling** (70% and above efficient) free cooling strategy
- No water use - dry cooling mode
- 5,000-100,000 CFM or Higher
- 30 kW-600 kW of cooling capacity
- Double wall foam filled thermal break construction
- Trim - chilled water cooling 10% -50%
- 100% - DX back up
- EC fan variable speed technology
- Modularity plus scalability to suit site requirements and performance
- Single point power
- ETL Listed and Labeled in accordance with UL1995

Resources Available for This Product

- Catalog Online



- Patent #8,584,739 and other patents pending

United Metal Products

1920 E Broadway Road Tempe, AZ 85282
T 480.968.9550
F 480.968.9555
www.unitedmetal.com